

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
21 July 2005 (21.07.2005)


PCT

(10) International Publication Number  
**WO 2005/065518 A1**

- (51) International Patent Classification<sup>7</sup>: **A47L 13/254**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number:  
**PCT/IB2003/006258**
- (22) International Filing Date:  
30 December 2003 (30.12.2003)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): PDC BRUSH NV [BE/BE]; Lodewijk De Raetlaan 28, B-8870 Izegem (BE).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): DECOOPMAN, Carl [BE/BE]; Doelstraat 153, B-8770 Ingelmunster (BE).
- (74) Agent: OSTYN, Frans; Kob Nv, Kennedypark 31 C, B-8500 Kortrijk (BE).
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CLEANING UTENSIL

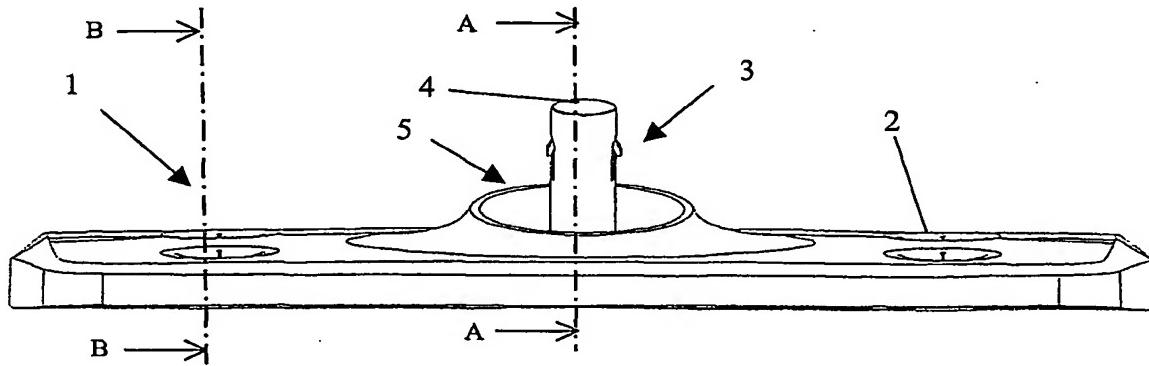

**WO 2005/065518 A1**

(57) Abstract: Cleaning utensil (1), comprising a body made of a first synthetic material in which at least one fastening element made (3) of a second synthetic material is provided, the second synthetic material being more elastic than the first synthetic material, the said utensil being manufactured in one piece and in one single injection operation.